


RF Driver Specifications 射频驱动器产品规格书 RD1012-200-24-003-CA

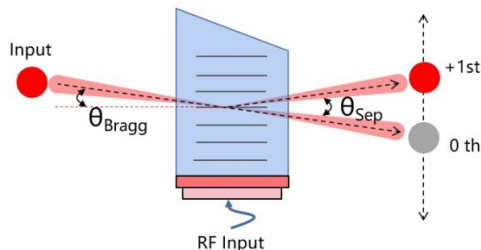

1. SPECIFICATIONS (规格)

RF frequency (频率频率)	200MHz
Frequency stability (频率稳定度)	+/-20ppm/°C
Output power (输出功率)	3W
VSWR (输出驻波比)	1.2/1
Linearity (线性度)	1.1/1
Digital Extinction ratio (数字消光比)	>45dB
Analog Extinction ratio (模拟消光比)	>45dB
Digital rise&fall time (数字调制上升&下降时间) (0%-100%)	<10ns
Analog rise&fall time (模拟调制上升&下降时间) (0%-100%)	<10ns
Trigger frequency (触发频率)	1MHz
Trigger delay (触发延迟)	50±10ns
Logic (逻辑)	TTL_HIGH=RF_OUTPUT
Digital input (数字输入)	Low<0.8V, 3.3V<High<5V@1kΩ
Analog input (模拟输入)	0-1V@1kΩ
Second and multiple harmonics (二次及多次谐波)	<-25dBc
Output Impedance (输出阻抗)	50Ω
DC Power Input (直流电源输入)	+24VDC
Supply current (供电电流)	0.8A@3W
Cooling (散热方式)	Conduction cooling (水冷散热)
Temperature Range (温度范围)	10-50°C环境温度


2. ORDERING CODES (编码规则)

	C/F	Supply voltage	PWR	IC/work mode	
RD1001—	XXX	— XXX —	XXX	— XX	
27.12 MHz	027	024 24 V	050 50 W	SA	散热片冷却, A05模式;
40.68 MHz	041	048 48 V	100 100 W	CF	传导冷却, FPS模式;


3. Interface difinition (接口定义)

名称	引脚	功能
Digital	SMC-M	外部数字信号控制 (3.3-5V)
Analog	SMC-M	外部模拟信号控制 (0-1V)
+24V电源	Feedthrough Caacitor	供电
RF OUT	SMA-F	射频输出

4. DIMENSIONS (外形尺寸-mm)

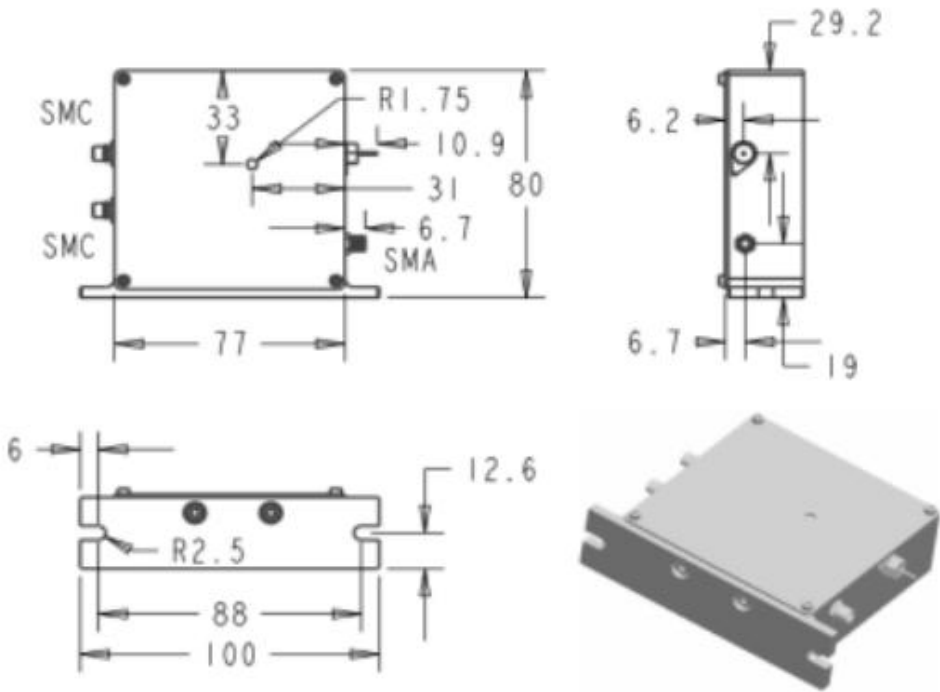

5. Control Logic (控制逻辑)

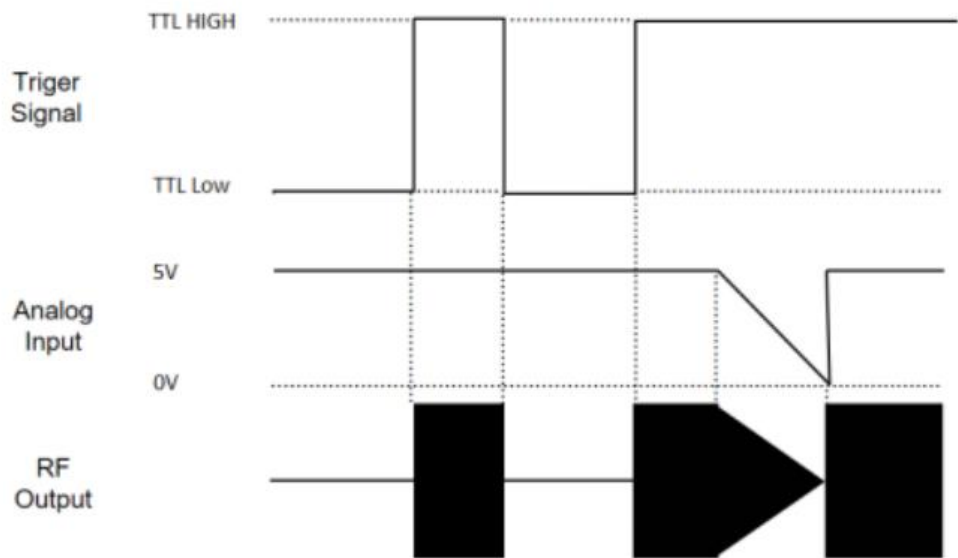

6. SUGGESTED AO Device (建议声光器件型号)

FM0013-TL080-P01-1550

7. REVISION (版本)

Number (版本号)	Revisions date (修订日期)	Revision (修改项目)	Revision description (修订内容说明)
A	2024. 9. 5	New	/

Quality Assured: In house made, high damage threshold, Vacuum bonding, 100% Diffraction efficiency test & burn-in test.