


HV Driver Specifications
高压驱动器产品规格书
HD0013-024040-0010FS




1. SPECIFICATIONS (规格)

Output amplitude (输出幅值)	±2000V
High voltage overshoot (高压过冲)	<10%
Output pulse width (输出脉冲宽度)	10ns-1000ns
Repetition rate accuracy (重复频率精度)	100Hz
Max. repetition rate (最大重复频率)	10kHz
Trigger delay (触发延迟)	< 10ns
Pulse jitter (脉冲抖动)	<1ns
Rise/Fall time (上升/下降时间)	≤8ns
Output pulse waveform (输出脉冲波形)	Square (方波)
Load capacitance (负载电容)	≤ 10pF
Power (供电)	+24V DC
Connector (接口)	PiN
Control material (控制材料)	Push switch (带屏幕)
Cooling (散热方式)	Forced air cooling (风冷)
Operation temperature (工作温度)	0°C~60°C
Storage humidity (存放湿度)	<80%RH

2.ORDERING CODES (编码规则)

	Power		Amplitude		Repetition rate				
HD0001	—	XXX	—	XXX	—	X	X		
	110V	110	4000V	040	100kHz	100	风冷	F	方波
	220V	220	6000V	060	500kHz	500	水冷	W	正弦波
									S
									C

3. DIMENSIONS (外形尺寸-mm)

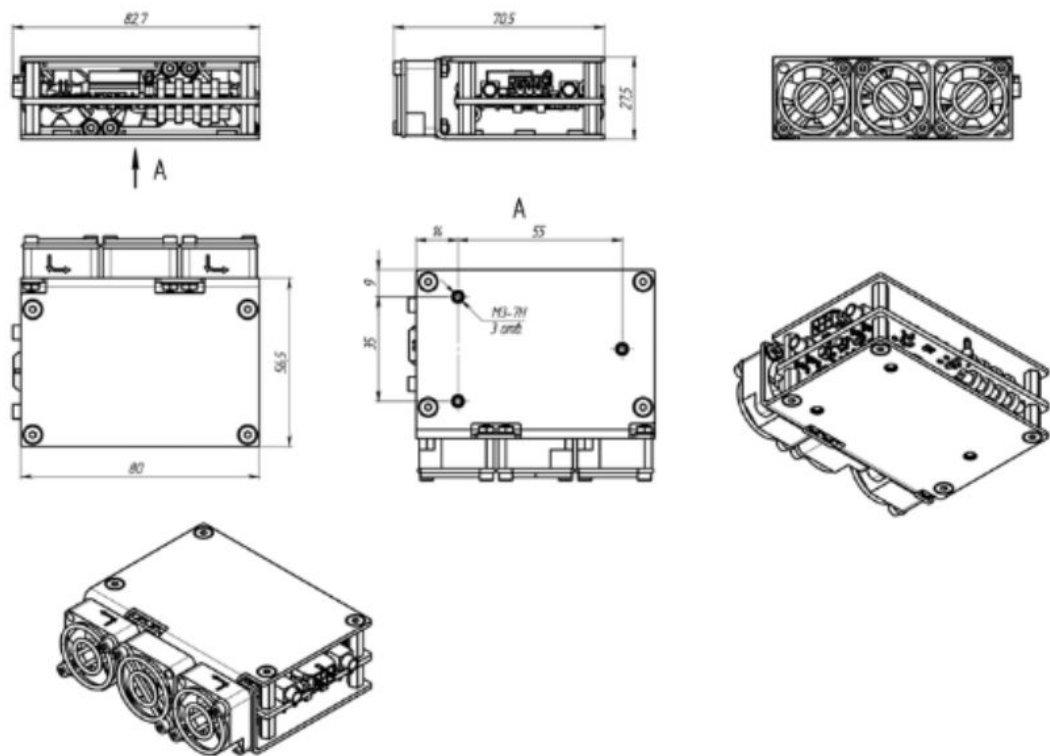

4. SUGGESTED MODULATOR ELECTRONICS (建议调制器型号)

5. REVISION (版本)

Number (版本号)	Revisions date (修订日期)	Revision (修改项目)	Revision description (修订内容说明)
A	2022.7.26	New	/

Quality Assured: In house made, high damage threshold, Vacuum bonding, 100% Diffraction efficiency test & burn-in test.