


AODF Specifications 声光偏转器产品规格书 DF1003-QL230_110-020-266

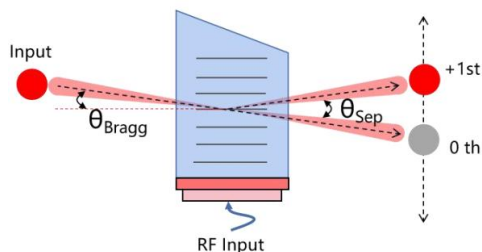

1. SPECIFICATIONS (规格)

Interaction material (介质材料)	Crystal quartz (石英)
Acoustic mode (声波模式)	Longitudinal (纵波)
Operating wavelength (工作波长)	266nm
Polarization (光偏振)	Linear, perpendicular to base (线偏振, 垂直于基座)
Transmission (透过率)	> 99%
Active aperture (有效孔径)	2.0mm
Center frequency (Fc) (中心频率)	230MHz
RF bandwidth (RB) (射频带宽)	110MHz
Diffraction efficiency (衍射效率) @RB	> 40%
RF power (射频功率)	3.5 W (max)
Input Impedance (输入阻抗)	50Ω Nominal
VSWR (驻波比) @Fc	< 2.1:1
RF connector (射频接头)	SMA-F
Cooling (散热方式)	Conduction-cooled (传导冷却)
Shell material (外壳材料)	Aluminum alloy 6063 (铝6063)
Water cooling channel material (水冷块材料)	Stainless steel 316 (不锈钢316)


2. PERFORMANCE vs. WAVELENGTH (性能 vs. 波长)

Wavelength (光波长)	266nm
Bragg angle (布拉格角) @Fc	4.6mrad
Separation angle (分离角) @Fc	9.3mrad
Scan angle (扫描角度) @RB	4.6mrad

3. ORDERING CODES (编码规则)

	Fc	RB	Active aperture			Wavelength		
DF0001— QL	XXX	—	XXX	—	—	XXX	—	XXXX
	27.12 MHz 027	010	10 MHz 040	4 mm	266	266 nm		
	40.68 MHz 041	050	50 MHz 060	6 mm	355	355 nm		
	80 MHz 080	080	80 MHz 080	8 mm				

4. DIMENSIONS (外形尺寸-mm)

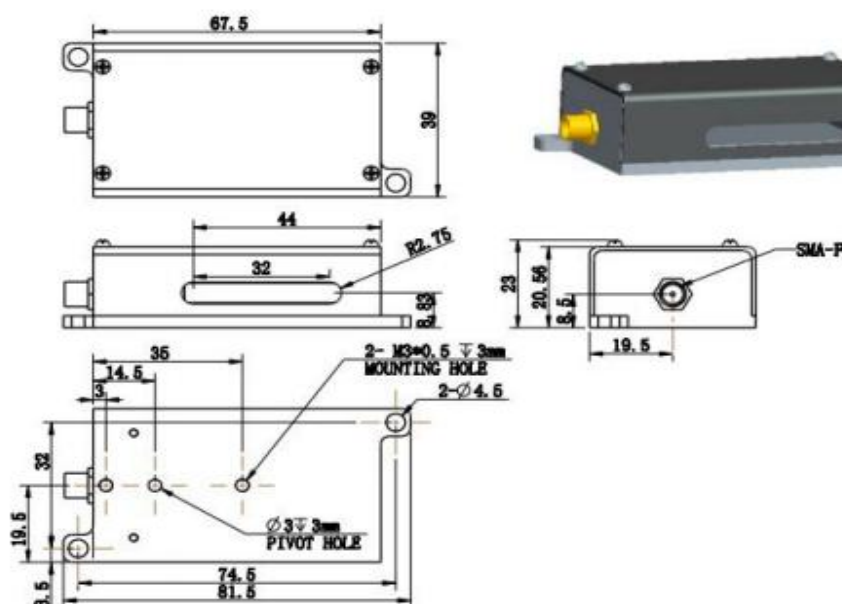

5. SUGGESTED RF DRIVER ELECTRONICS (建议驱动型号)

RB2002-200_100-24-010-CA

6. REVISION (版本)

Number (版本号)	Revisions date (修订日期)	Revision (修改项目)	Revision description (修订内容说明)
A	2022. 9. 23	New	/

Quality Assured: In house made, high damage threshold, Vacuum bonding, 100% Diffraction efficiency test & burn-in test.

